

LCD Projector

HITACHI
Inspire the Next



CP-RX250 XGA 2700 ANSI LUMENS

Convenient Functions

- 215W UHO Lamp, XGA resolution
- Built-in 1W Speaker, Standby Audio
- Direct Power On/Off
- Equalizing Gamma / Color Temperature
- Template Function
- Projector Control with RS-232C commands
- High Performance Air Filter (Up to 5,000hour*) without cleaning

Lamp Power saving mode

- Intelligent Eco
- Eco Mode
- Saver Mode

Installation Flexibility

- x1.2 Optical Zoom
- Vertical Keystone
- Ceiling Mount / Desk Top Installation

Versatile Security Functions


- PIN Lock, Security Bar / Security Slot, Key Lock

*Varies according to usage environment


LCD Projectors

Specifications	
Model name	CP-RX250EF
Product name	Liquid crystal projector 3LCD
Liquid crystal panel	768,431 pixels (1024 x 768)
Lamp	215W UHP
Light output (brightness)	2700lm
Contrast ratio (Presentation mode)	2000:1
Speaker	1W
Display resolution video	NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43, 525i(480i), 525p(480p), 625i(576i)
Power supply / Rated current	AC 100V-120V / 3.3A AC220-240V / 1.6A
Power consumption	320W
Temperature range	5~35°C
Dimensions (WxHxD)	320 x 85 x 245 mm
Weight (mass)	3.0 kg
Terminals	
Computer In	15-pin Mini-D-sub x 1
Computer Out	No
Composite video In	RCA connector x 1
Control (RS232C)	D-sub 9-pin connector x 1
Audio In	3.5mm stereo mini con. x 1
Other	
Lamp life	6000 / 5000 hr
Filter cleaning cycle	5000 hr
Altitude	up to 10,000 feet
Operation parts	
Lamp	DT01431

Dimensions

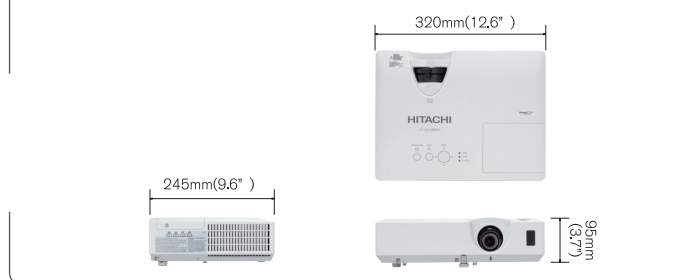

Projection Distance

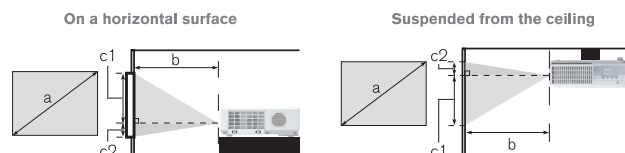

(1280 x 800) (±10%)

Screen size (diagonal)	16:10								4:3							
	type		Projection distance				c1		c2		Projection distance				c1	
			min	max	min	max	min	max	min	max	min	max	min	max	min	max
(inch)	m	inch	m	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm	inch
30	0.8	0.9	36	1.1	44	38	15	3	1	1.0	41	1.3	50	42	17	3
40	1.0	1.2	49	1.5	59	50	20	4	2	1.4	56	1.7	67	57	22	4
50	1.3	1.6	62	1.9	74	63	25	5	2	1.8	70	2.1	84	71	28	5
60	1.5	1.9	74	2.3	89	75	30	6	2	2.1	84	2.6	101	85	33	7
70	1.8	2.2	87	2.7	105	88	34	7	3	2.5	99	3.0	119	99	39	8
80	2.0	2.5	99	3.0	120	100	39	8	3	2.9	113	3.4	136	113	45	9
90	2.3	2.8	112	3.4	135	113	44	9	3	3.2	127	3.9	153	127	50	10
100	2.5	3.2	125	3.8	150	125	49	10	4	3.6	142	4.3	170	142	56	11
120	3.0	3.8	150	4.6	181	150	59	12	5	4.3	170	5.2	205	170	67	13
150	3.8	4.8	188	5.7	226	188	74	14	6	5.4	213	6.5	256	212	84	16
200	5.1	6.4	251	7.7	302	250	98	19	8	7.2	285	8.7	342	283	111	22
250	6.4	8.0	315	9.6	378	313	123	24	9	9.1	357	10.9	428	354	139	27
300	7.6	9.6	378	11.5	454	375	148	29	11	10.9	428	13.1	514	425	167	33

Terminals

CP-RX250

