

CP-X4042WN

HITACHI

Key Features

- 4,200 lumens Brightness
- 10000:1 Contrast
- XGA(1024x768) Resolution
- 0.63" 3LCD Polysilicon TFT active matrix
- Crestron RoomView™, AMX, LAN control
- x1.2 Manual zoom, focus
- 3.0kg
- PC-less presentation
- Geometric correction(Perfect Fit)
- MIC input
- 16W speaker
- Eco projector




Specification

모델명(Model Name)		CP-X4042WN
투사방식(Display Technology)		0.63" 3LCD Polysilicon TFT active matrix
밝기(Brightness)		4,200 lumens
명암비(Contrast)		10000:1
해상도(Native resolution)		XGA (1024x768)
화면비(Aspect ratio)		4:3
램프(lamp)	램프번호(Part Number)	DT01481
	타입(Type)	225W
	수명(Lifetime)	10000 hrs(Eco2) / 8000 hrs(Eco1) / 5000 hrs(Nomal)
렌즈(Lens)	렌즈(Lens)	f=19~23mm
	투사비율(Throw ratio)	1.5-1.8:1
	렌즈쉬프트(Lens shift)	-
	키스톤(Keystone)	Vertical ±30°, Horizontal ±30°
	줌(Zoom)	Manual x 1.2
	포커스(Focus)	Manual
중형왜곡보정(Geometric correction)		Perfect Fit (8점 보정)
화면사이즈(Diagonal)		30 ~ 300"
입력단자(Input)		2 X 15-pin Mini D-sub(RGB) 2 X HDMI(MHL) 1 X RCA(Composite) 2 X Φ3.5 Stereo Audio 1 X 2RCA(L/R) Audio 1 X Φ3.5 Stereo(MIC)
출력단자(Output)		1 X 15-pin Mini D-sub(RGB in2) 1 X Φ3.5 Stereo Audio
컨트롤/서비스 단자(Control/Service)		1 X D-sub 9pin(RS232C) 1 X RJ-45 2 X USB Type A 1 X USB Type B
입력 신호(Input signal)		VGA, SVGA, XGA, WXGA, SXGA, WXGA+, SXGA+, UXGA, (compressed), MAC 16"
비디오 포맷(Video Formats)		NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43 480i/p, 576i, 720p, 1080i/p
작동 온도(Temperature)		5 ~ 35°C
스피커(Speaker)		16W
팬 소음(Fan Noise)		37 dB(Normal) / 29 dB(Eco)
정격 전압(Operating voltage)		AC 100-240V, 50/60Hz
소비 전력(Power consumption)		310W(Normal) / 0.5W(Stand-by)
규격(Size)		(W)320 x (H)85 x (D)245 mm
무게(Weight)		3.0kg


※ 제품의 외관 및 사양은 성능 개선을 위해 사전 예고 없이 변경될 수 있습니다.

Terminals

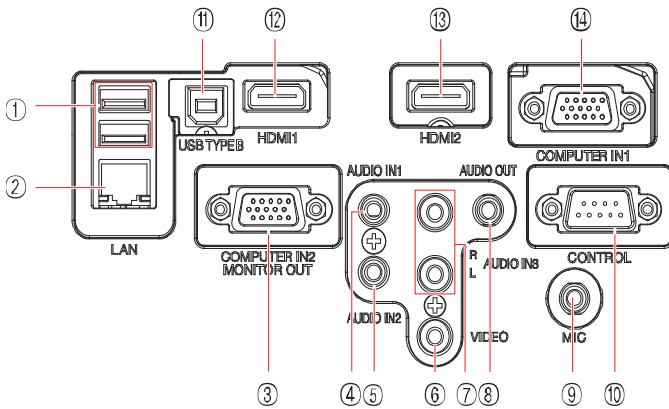

- ① USB(A) 입력 1,2
- ② RJ45 입력
- ③ RGB 입력 2/출력
- ④ 오디오 입력 1
- ⑤ 오디오 입력 2
- ⑥ 비디오 입력
- ⑦ 오디오(L/R) 입력
- ⑧ 오디오 출력
- ⑨ MIC 입력
- ⑩ RS232컨트롤 입력
- ⑪ USB(B) 입력
- ⑫ HDMI 입력 1
- ⑬ HDMI 입력 2
- ⑭ RGB 입력 1

Dimension

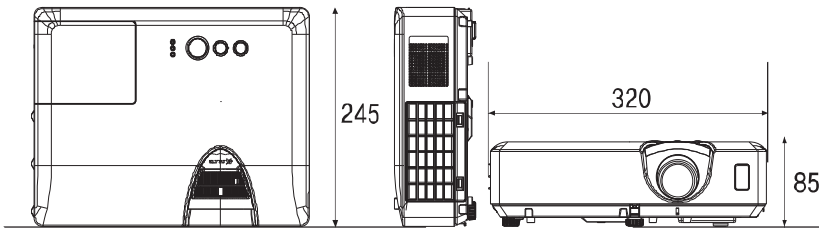

(W)320 x (H)85 x (D)245 mm

Throw Distance

렌즈명	CP-X4042WN	
F값	F 1.9-2.3	
초점거리	f=19~23mm	
투사거리비율	1.5-1.8:1	
줌/포커스	x1.2 / Manual	
해상도	XGA (1024x768) 4:3	
인치	최소	최대
40	1.19	1.44
60	1.80	2.17
80	2.41	2.90
100	3.02	3.63
120	3.62	4.36
150	4.54	5.46
180	5.45	6.55
200	6.06	7.28
250	7.58	9.11
300	9.10	10.94

※ 거리단위: m / 모든 측정 수치는 대략의 수치이며, 실제 사이즈와 다소 차이가 있을 수 있습니다. (±7%)

※ 제품의 외관 및 사양은 성능 개선을 위해 사전 예고 없이 변경될 수 있습니다.